

Conflex®

Shrink Packaging Machinery

FUSION SYNC

Continuous Motion Side Seal Wrapper

Fusing Tomorrow's Shrink Packaging Requirements on Today's Budget



Conflex®...Flexible People Make Flexible Systems

Fast—100 feet per minute / 80 packages per minute

Flexible—Expanded sealing capacity for larger package sizes

Value Priced—Versus other continuous motion sealers

Safe—Infeed and seal area guard covers provide safety and easy operator access

Compact Footprint—Allows the machine to fit most packaging environments

Tool-less Changeover—Hand wheel adjustments provide easy, tool-less package size changeover

Conflex® ...Flexible People make Flexible Systems

Engineered for maximum flexibility, reliability and performance. Conflex® shrink packaging equipment incorporates leading-edge technology to take on the toughest shrink packaging challenges.

Value Priced—Versatile and Flexible

The Conflex® *FUSION SYNC* continues the *FUSION* Series reputation as the shrink wrapping industry's best value! The combination of *expanded sealing capacities, continuous motion speed and value price* make the *FUSION SYNC* the perfect wrapper for automatic applications. Compared to other machines in its class, Conflex makes the *FUSION SYNC* the smart choice to fill your shrink wrapping needs.

Conflex® *FUSION Sync* Features and Benefits

- **Color HMI Touch Screen**—Provides intuitive, operator-friendly product setups in three languages
- **Easy Load Film Cradle**—The fast threading process makes changeovers more efficient
- **Self-Tracking Belts**—Eliminate tracking issues and reduces maintenance (Infeed Only)
- **Open Access/Swing-Out Inverting Head**—Allows fast film threading
- **Servo Controlled Continuous Motion Cross Seal**
- **UL Listed Electronics**—For dependable operation
- **Mushroom Style Cross Seal**—Provides positive hot knife sealing
- **Casters and Leg Levelers**—Standard equipment
- **4 Modes of operation** – provides a variety of product spacing opportunities
- **Multiple Options Available**—Left-to-right product flow, stainless steel and other customizable options available


Conflex® *FUSION* Series Specifications

Electrical Requirements	230V, 20 Amps, 3 Phase
Air Requirements	80 psi, 5 cfm
Seal Bar Width and Height	24" wide, 10" high
Maximum Film Width	30"
Maximum Roll Diameter	14"
Overall Machine Dimensions	120" L x 57.5" W x 59.5" H
Maximum Operating Speeds	100' film per minute
Deck Height on Casters	34 3/4"
Package Dimensions*	2" L to unlimited L 1" W to 22" W** 1/8" H to 10" H

*May require additional components and set-up time to run the entire size range.

**Product dependent.

Conflex® *FUSION Sync* Plan View

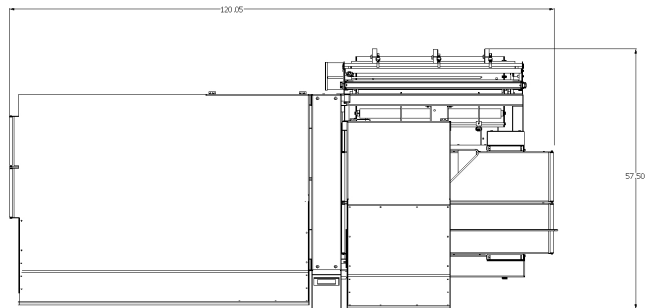

The Conflex® engineering department is available to customize machinery for special product applications.

Distributed by:



Conflex Incorporated
Manufacturing Facility:
W130 N 10751 Washington Drive
Germantown, WI 53022

Toll Free: 800-225-4296
Fax: 262-512-1665
Email: info@conflex.com
www.conflex.com