

COLUMBIA

M. J. MAILLIS GROUP

GB

BATTERY



STRAPPING TOOLS

FOR PP/PET

BATTERY STRAPPING TOOLS FOR PP/PET STRAP

DIGIT SMART MT CLUTCH

FLAT AND ROUND SURFACES BATTERY STRAPPING TOOL, MANUAL TENSION AND FRICTION WELD SEAL

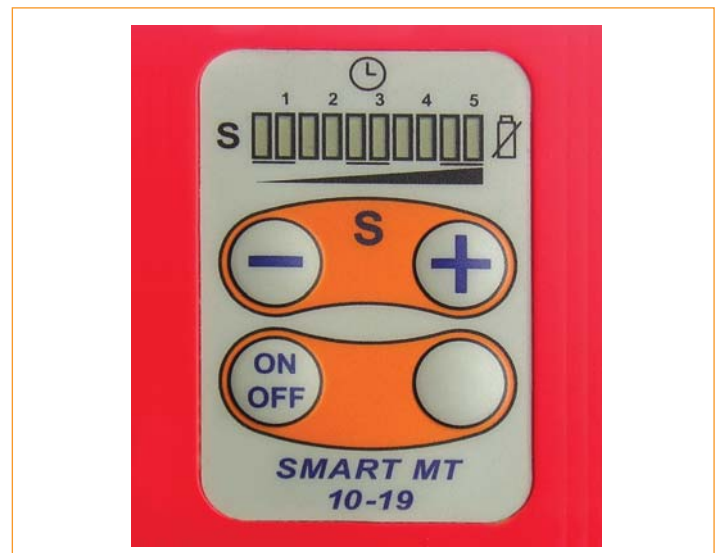


CHART OF TYPES

MODEL	ITEM.NO.	STRAP WIDTH
DIGIT SMART MT	150.990.810	10-19 mm. 3/8"-3/4"

TECHNICAL DATA

Strap quality	PP/PET
Joint type	friction weld seal
Package type	flat (min. 120 mm - 5") round surface (min. diam. 700 mm - 28")
Strap width	from 10 mm up 19 mm (3/8" - 3/4")
Strap thickness	from 0.5 up to 1.0 mm
Max tension	2000 N (clutch adjustable)
Battery	Makita 14.4 Vdc - 3.0 Ah Li-ion
Weight	around 3,9 kgs / 8.5 lbs (battery included)



Sealing time setting

BATTERY STRAPPING TOOLS FOR PP/PET STRAP

SMART WELDING



CHART OF TYPES

MODEL	ITEM.NO.	STRAP WIDTH
SMART WELDING	152.990.810	10-19 mm. 3/8"-3/4"


FLAT AND ROUND SURFACES BATTERY STRAPPING TOOL FRICTION WELD SEAL

TECHNICAL DATA

Strap quality	PP/PET
Joint type	friction weld seal
Package type	flat and round. Suitable for strapping fibre bales using press system
Strap width	from 10 mm up 19 mm (3/8" - 3/4")
Strap thickness	from 0.4 up to 1.27 mm. PET (0,016" - 0,050")
Max tension	only for welding strapping tool
Battery	Makita 14.4 Vdc - 3.0 Ah Li-ion
Weight	around 2,3 kgs (battery included)



Ergonomic handle - New sealing and opening lever

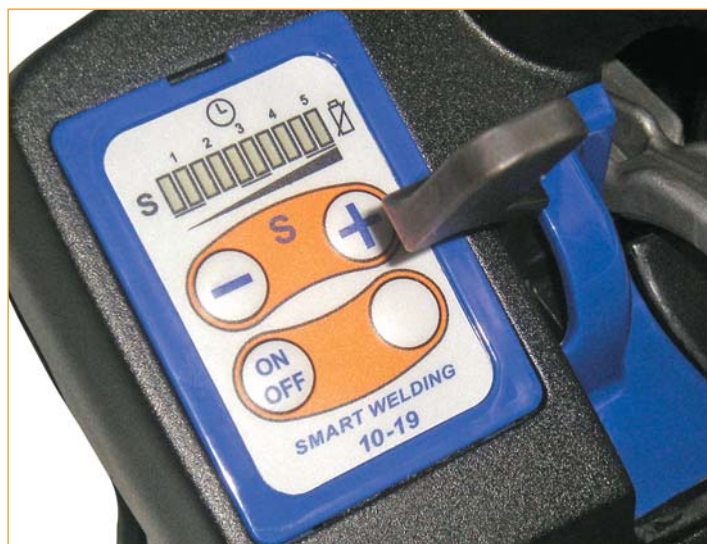

New digital adjustment system for tension and sealing time

BATTERY STRAPPING TOOLS FOR PP/PET STRAP

DIGIT SMART LXT

FLAT AND ROUND SURFACES BATTERY STRAPPING TOOL FRICTION WELD SEAL



CHART OF TYPES

MODEL	ITEM.NO.	STRAP WIDTH
DIGIT SMART LXT	127.990.810	10-16 mm. 3/8"-5/8"

TECHNICAL DATA

Strap quality	PP/PET
Joint type	friction weld seal
Package type	flat (min. 120 mm. - 5") round surface (min. diam. 700 mm. - 28")
Strap width	10-13-16 mm / 3/8" - 1/2" - 5/8"
Strap thickness	from 0.5 up to 1.0 mm. / 0.019" - 0.038"
Max tension	2300 N - 506 lbs
Max tension speed	around 12 mt/min - 39,33 ft/min
Battery	Makita 14.4 Vdc - 3.0 Ah Li-ion
Weight	around 3,8 kgs / 8.3 lbs (battery included)



Recharger for Li-ion Battery



New digital adjustment system for tension and sealing time



ITEM NO. 291.336.400

Inox plate protection for Digit LXT, SMART, POWER



Li-ion Battery

- High capacity
- No memory effect
- Light and compact
- Built-in memory chip

BATTERY STRAPPING TOOLS FOR PP/PET STRAP

DIGIT SMART



CHART OF TYPES

MODEL	ITEM.NO.	STRAP WIDTH
DIGIT SMART	125.990.810	10-16 mm. 3/8"-5/8"

FLAT AND ROUND SURFACES BATTERY STRAPPING TOOL FRICTION WELD SEAL

TECHNICAL DATA - SPECIAL ORDER

Strap quality	PP/PET
Joint type	friction weld seal
Package type	flat (min. 120 mm. - 5") round surface (min. diam. 700 mm. - 28")
Strap width	10-13-16 mm / 3/8" - 1/2" - 5/8"
Strap thickness	from 0.5 up to 1.0 mm. / 0.019" - 0.038"
Max tension	2000 N - 440 lbs
Max tension speed	around 9 mt/min - 29,5 ft/min
Battery	Makita 12 Vdc - 2.0 Ah - Ni-Cd
Weight	around 3,9 kgs / 8.5 lbs (battery included)



Ergonomic handle - New sealing and opening lever



New digital adjustment system for tension and sealing time



Suspension bracket

BATTERY STRAPPING TOOLS FOR PP/PET STRAP

ACCESSORIES FOR DIGIT TOOLS


BATTERIES-RECHARGERS POWER SUPPLY



REF	MODEL	ITEM CODE
A	BATTERY NiCd 2.0 Ah 12V	521.002.600
B	BATTERY NiMH 2.6 Ah 12V	521.002.620
C	BATTERY Li-ion 3.0 Ah 14.4V	521.009.920

REF	MODEL	ITEM CODE
D	RECHARGER FOR NiCd and Ni-MH Battery	521.002.610
E	RECHARGER FOR Li-ion Battery	521.009.930
F	DIGIT SMART POWER SUPPLY	521.005.000

STRAPPING TOOLS ACCESSORIES



REF	MODEL	ITEM CODE
A	SPIRAL AIR PIPES 15 MT LENGHT SIZE 8x10	281.218.300
	SPIRAL AIR PIPES 15 MT LENGHT SIZE 6x8	281.218.400
B	BALANCER RANGE 3-6 KGS (6.6-13.2 lbs)	605.080.080
	BALANCER RANGE 5-8.5 KGS (11-18.7 lbs)	605.080.090
C	BALANCER POWER 9-15 KGS (19.8-33 lbs)	605.080.900
D	SAFETY CUTTER FOR STRAP (LIGHT APPLICATION) MJC 01	610.100.430
E	SAFETY CUTTER FOR STRAP (HARD APPLICATION) MJC 02	610.100.420



DIGIT POWER

FLAT AND ROUND SURFACES BATTERY STRAPPING TOOL FRICTION WELD SEAL



CHART OF TYPES

MODEL	ITEM.NO.	STRAP WIDTH
DIGIT POWER	126.990.810	16-19 mm. 5/8"-3/4"

TECHNICAL DATA

Strap quality	PP/PET
Joint type	friction weld seal
Package type	flat (min. 120 mm. - 5") round surface (min. diam. 700 mm. - 28")
Strap width	from 16 mm up to 19 mm (5/8" - 3/4")
Strap thickness	from 0.8 up to 1.3 mm. PET - from 0.8 up to 1.0 mm PP
Max tension	3400 N - 748 lbs
Max tension speed	around 13 mt/min - 42,6 ft/min
Battery	Makita 14.4 Vdc - 3.0 Ah Li-ion
Weight	around 3,9 kgs / 8.5 lbs (battery included)



Ergonomic handle - New sealing and opening lever



Rubber Cover for digit LXT, SMART, POWER - Cod. 280.840.900



Suspension bracket - Cod. 221.044.500



New digital adjustment system for tension and sealing time



COLUMBIA

M. J. MAILLIS GROUP

COLUMBIA s.r.l.

via Della Repubblica, 44 - 20020 Solaro (MI) Italy

phone No. +39 02.96.79.03.81 - fax No. +39 02.96.79.03.97

www.maillis.gr - www.columbiatools.it

e-mail: columbia@siat.com

